
NO THREADS. NO SWEAT. FLANGE CONNECTIONS FOR EVERY PRODUCT FITTINGS BALL VALVES SWEEPS FLOW **DRY-MATE METERS DRY-DISCONNECTS** ELECTRIC LINE VALVES STRAINERS TANK PUMPS FITTINGS

# SKIP THE TAPE AND SEALANT

Flange connections utilize clamps instead of threads, facilitating quick and easy assembly and disassembly while ensuring a leak-proof system. Threaded pipe needs tape or sealant, and the slightest imperfection in the pipe or seal can cause a leak. With properly installed flange connections, you won't worry about connection leaks or wait for sealant to cure.



Time spent unthreading systems and repairing leaks from faulty connections is unproductive and ultimately hits your pocketbook. Banjo's manifold flange systems get you back in the field and out of the shop in no time.

# >>> GET RIGHT TO THE SOURCE

With Banjo manifold flange connections, the days of spending hours unhooking entire systems of valves and fittings are over. You can directly isolate and replace the problematic part or replumb sections without disassembling the whole system.



# **1" MEVX SERIES**

#### FEATURES

- 12-volt DC operated
- 24-volt available
- Open/closed indicator
- ON/OFF has <sup>3</sup>/<sub>4</sub> second response
- Regulating has 4 second response
- Open / Close verification available
- IP68 waterproof
- -0 to 150F (-18 to 65C) operating
- -67 to 221F (-55 to 105C) storage
- On/Off Actuator rated to 500,000 cycles
- Regulating Actuator rated to 250,000 cycles
- Valve rated to 50,000 cycles leak-free
- Bolted valves have the same exact dimensions as our legacy EV valves.
- Additional protocols available including CAN/ISO BUS & Proportional Control

#### MATERIALS

- 316 stainless steel ball & stem
- Poly ball available on bolted valves
- Stainless steel hardware
- Fiberglass reinforced polypropylene
- PTFE seats
- FKM stem seals

#### ON/OFF

- Red = +12V DC
- Black = Ground
- White = +12VDC (Open) 0VDC (Close)

# **4 WIRE REGULATING**

- Red = +12V DC (Open)
- White = Ground (Open)
- Black = +12V DC (Close)
- Green = Ground (Close)





1" MEVX ON/OFF WELDED ELECTRIC VALVES							
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY		
MEVX100	1" FULL PORT ELECTRIC VALVE	300	1"	1"	1		

1" MEVX REGULATING WELDED ELECTRIC VALVES							
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY		
MEVXR100	1" FULL PORT ELECTRIC VALVE	300	1"	1"	1		

#### **1" MEVX ON/OFF BOLTED ELECTRIC VALVES**

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX101	1" FULL PORT ELECTRIC VALVE	300	1"	1"	1

# 1" MEVX REGULATING BOLTED ELECTRIC VALVES

PART NO	DESCRIPTION		PIPE SIZE	OPENING THRU BALL	QTY
MEVXR101	1" FULL PORT ELECTRIC VALVE	300	1"	1"	1



# 2" MEVX ON/OFF WELDED ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX200	2" STANDARD PORT ELECTRIC VALVE	300	2"	1 <b>½</b> "	1
MEVX220	2" FULL PORT ELECTRIC VALVE	250	2"	2"	1

# 2" MEVX REGULATING WELDED ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVXR200	2" STANDARD PORT ELECTRIC VALVE	250	2"	1 <b>½</b> "	1
MEVXR220	2" FULL PORT ELECTRIC VALVE	250	2"	2"	1

2" MEVX ON/OFF BOLTED ELECTRIC VALVES						
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY	
MEVX201	2" STANDARD PORT ELECTRIC VALVE	250	2"	1 <b>½</b> "	1	
MEVX221	2" FULL PORT ELECTRIC VALVE	125	2"	2"	1	

#### 2" MEVX SERIES

#### FEATURES

- 12-volt DC operated
- 24-volt available
- Open/closed indicator
- ON/OFF has 1½ second response
- Regulating has 4 second response
- Open / Close verification available
- IP68 waterproof
- -0 to 150F (-18 to 65C) operating
- -67 to 221F (-55 to 105C) storage
- On/Off Actuator rated to 500,000 cycles
- Regulating Actuator rated to 250,000 cycles
- Valve rated to 50,000 cycles leak-free
- Bolted valves have the same exact dimensions as our legacy EV valves.
- Additional protocols available including CAN/ISO BUS & Proportional Control

#### MATERIALS

- 316 stainless steel ball & stem
- Poly ball available on bolted valves
- · Stainless steel hardware
- Fiberglass reinforced polypropylene
- PTFE seats
- FKM stem seals

# ON/OFF

- Red = +12V DC
- Black = Ground
- White = +12VDC (Open) 0VDC (Close)

#### **4 WIRE REGULATING**

- Red = +12V DC (Open)
- White = Ground (Open)
- Black = +12V DC (Close)
- Green = Ground (Close)



### 3" MEVX SERIES

#### **FEATURES**

- 12-volt DC operated
- 24-volt available
- Open/closed indicator 0
- ON/OFF 3" has 4 second 0 response
- Regulating 3" has 4 second response
- Open / Close verification available
- IP68 waterproof
- -0 to 150F (-18 to 65C) • operating
- -67 to 221F (-55 to 105C) storage
- Actuator rated to 250,000 cycles
- Valve rated to 50,000 cycles 0 leak-free
- Additional protocols available 0 including CAN/ISO BUS & Proportional Control

# MATERIALS

- 316 stainless steel ball & stem
- Stainless steel hardware
- Fiberglass reinforced polypropylene
- Zinc alloy lower actuator housing
- PTFE seats
- FKM stem seals 0

### **ON/OFF**

- Red = +12V DC
- Black = Ground
- White = +12VDC (Open) 0VDC (Close)

#### **4 WIRE REGULATING**

- Red = +12V DC (Open)
- White = Ground (Open)
- Black = +12V DC (Close) 0
- Green = Ground (Close)



3"	MEVX	ON/OFF	ELECTRI	C VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX300	3" FULL PORT ELECTRIC VALVE	125	3"	3"	1

<b>3" MEVX REGULATING E</b>	LECTRIC VALVES
-----------------------------	----------------

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVXR300	3" FULL PORT ELECTRIC VALVE	125	3"	3"	1





#### 1"-3" MEVX BOTTOM LOAD ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX100BL	1" FULL PORT MANIFOLD BOTTOM LOAD ELECTRIC VALVE	300	1"	1"	1
MEVX200BL	2" STANDARD PORT MANIFOLD BOTTOM LOAD ELECTRIC VALVE	250	2"	11⁄2"	1
MEVX220BL	2" FULL PORT MANIFOLD BOTTOM LOAD ELECTRIC VALVE	125	2"	2"	1
MEVX300BL	3" FULL PORT MANIFOLD BOTTOM LOAD ELECTRIC VALVE	125	3"	3"	1

### 1"-2" MEVX SIDE LOAD ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX100SL	1" FULL PORT MANIFOLD SIDE LOAD ELECTRIC VALVE	300	1"	1"	1
MEVX200SL	2" STANDARD PORT MANIFOLD SIDE LOAD ELECTRIC VALVE	250	2"	11⁄2"	1
MEVX220SL	2" FULL PORT MANIFOLD SIDE LOAD ELECTRIC VALVE	125	2"	2"	1

### 1"-2" MEVX SIDE LOAD REGULATING ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVXR100SL	1" FULL PORT MANIFOLD SIDE LOAD ELECTRIC VALVE	300	1"	1"	1
MEVXR200SL	2" STANDARD PORT MANIFOLD SIDE LOAD ELECTRIC VALVE	250	2"	11⁄2"	1
MEVXR220SL	2" FULL PORT MANIFOLD SIDE LOAD ELECTRIC VALVE	125	2"	2"	1

### 1"- 3" MEVX SERIES BOTTOM & SIDE LOAD VALVES

#### **FEATURES**

- 12-volt DC operated
- 24-volt available
- · Open/closed indicator
- ON/OFF 1" has <sup>3</sup>/<sub>4</sub> second response
- ON/OFF 2" has 1½ second response
- ON/OFF 3" has 4 second response
- Open / Close verification available
- IP68 waterproof
- -0 to 150F (-18 to 65C) operating
- -67 to 221F (-55 to 105C) storage
- 1"-2" On/Off Actuator rated to 500,000 cycles
- 3" On/Off & Regulating Actuator rated to 250,000 cycles
- Valve rated to 50,000 cycles leak-free
- Additional protocols available including CAN/ISO BUS & Proportional Control

#### MATERIALS

- 316 stainless steel ball & stem
- Stainless steel hardware
- Fiberglass reinforced polypropylene
- Zinc alloy lower actuator housing (3" only)
- PTFE seats
- FKM stem seals

#### ON/OFF

- Red = +12V DC
- Black = Ground
- White = +12VDC (Open) 0VDC (Close)

#### **4 WIRE REGULATING**

- Red = +12V DC (Open)
- White = Ground (Open)
- Black = +12V DC (Close)
- Green = Ground (Close)



### **MEVX BANKED VALVES**

#### **FEATURES**

- Valve sizes 1"-2" SP
- Number of valves from two to five bank
- Welded or bolted valves available
- Bolted valves have the same exact dimensions as our legacy EV valves.
- Additional protocols available including CAN/ISO BUS & Proportional Control





### MEVX ON/OFF WELDED BANKED ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX102	1" FULL PORT 2 BANK ELECTRIC VALVE	300	1"	1"	1
MEVX103	1" FULL PORT 3 BANK ELECTRIC VALVE	300	1"	1"	1
MEVX104	1" FULL PORT 4 BANK ELECTRIC VALVE	300	1"	1"	1

#### MEVX ON/OFF BOLTED BANKED ELECTRIC VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
MEVX1012	1" FULL PORT 2 BANK ELECTRIC VALVE	300	1"	1"	1
MEVX1013	1" FULL PORT 3 BANK ELECTRIC VALVE	300	1"	1"	1
MEVX1014	1" FULL PORT 4 BANK ELECTRIC VALVE	300	1"	1"	1

# 1" LEV ELECTRIC MANIFOLD VALVE

#### **FEATURES**

- TFM seats & EPDM seals
- 12-volt DC operated
- Internally fused/automatic reset
- Stationary current draw: less than 0.04 amps
- Rotating current draw: less than 0.40 amps
- Stall current: 0.75 amps
- <sup>1</sup>/<sub>3</sub> second response time
- Integrated mounting slot
- 3 wire configuration
- Higher torque motor to power through thick liquids and demanding applications. (MLEV100A)
- Reinforced nylon stem more than triples the strength of the standard 1" LEV. (MLEV100A)

### ON/OFF

- Red = +12V DC
- Black = Ground
- White = +12VDC (Open) 0VDC (Close)





MLEV100

MLEV100A

MLEV100C

	1" ON/OFF ELECTRIC VALVES									
PART NO			PIPE SIZE	OPENING THRU BALL	QTY					
MLEV100	1" MANIFOLD ELECTRIC VALVE	300	1"	1⁄2"	1					
MLEV100A	1" MANIFOLD ELECTRIC VALVE WITH HIGHER TORQUE MOTOR, SS BALL	300	1"	1/2"	1					
MLEV100C	1" MANIFOLD ELECTRIC VALVE WITH HIGHER TORQUE MOTOR, SS BALL, 3 WIRE	300	1"	1⁄2"	1					



	MANIFOLD 4 & 6 BOLTED VALVES										
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	LOT QTY	REPLACEMENT HANDLE	REPAIR KIT				
MV100CF	1" FULL PORT MANIFOLD VALVE	300	1"	1"	12	V10153A	V10200				
MV200CF	2" STANDARD PORT MANIFOLD VALVE	225	2"	11⁄2"	12/BOX	V20153	N/A				
MV220CF	2" FULL PORT MANIFOLD VALVE	300	2"	2"	8/BOX	V25153	V25200				
MV300	3" STANDARD PORT MANIFOLD VALVE	150	3"	21⁄2"	6/BOX	V25153	V30200				
MV300CF	3" FULL PORT MANIFOLD VALVE	200	3"	3"	6/BOX	V25153	V35200				

# 1" - 3" 4 & 6 BOLTED VALVES

### FEATURES

- FKM seals.
- Precision molded polypropylene is reinforced with fiberglass for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle
- Ball is diamond turned, after molding, to make it spherically perfect, which provides precise contact between ball and seats.
- PTFE self-lubricating stem bushings and seats cannot stick or bind
- Stainless steel bolts

#### **REPAIR KIT INCLUDES:**

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem o-ring

# 2" BOLTED 5 WAY VALVE

## FEATURES

- FKM seals
- Precision molded polypropylene is reinforced with fiberglass for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle
- Ball is diamond turned, after molding, to make it spherically perfect, which provides precise contact between ball and seats.
- PTFE self-lubricating stem bushings and seats cannot stick or bind
- Stainless steel bolts



MANIFOLD BOLTED 5 WAY VALVE								
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY			
MV225CF	2" FULL PORT MANIFOLD 5 WAY VALVE	100	2"	2"	1			

29

### **2" STUBBY VALVES**

#### **FEATURES**

- Precision molded polypropylene is reinforced with fiberglass for additional strength.
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle.
- Ball is diamond turned, after molding, to make it spherically perfect, which provides precise contact between ball and seats.
- PTFE self-lubricating stem bushings and seats cannot stick or bind.
- Stainless steel bolts.
- Standard size has TFE seals and Full Port size has FKM seals



VSMT200CF



VSF200CF



MVS220FP

(high

MVSF220FP





	2" MANIFOLD STUBBY VALVES										
PART NO	REPLACEMENT HANDLE	REPAIR KIT									
VSMT200CF	2" STANDARD PORT MANIFOLD VALVE FLANGE X MALE NPT W/TFE SEALS	150	2"	11⁄2"	6	VS20152SH	N/A				
VSF200CF	2" STANDARD PORT MANIFOLD VALVE FLANGE X MALE ADAPTER W/TFE SEALS	100	2"	11⁄2"	6	VS20152SH	N/A				
MVS220FP	2" FULL PORT MANIFOLD VALVE FLANGE X FEMALE NPT W/FKM SEALS	300	2"	2"	6	VS25153	VS25200				
MVSF220FP	2" FULL PORT MANIFOLD VALVE FLANGE X MALE ADAPTER W/FKM SEALS	150	2"	2"	9	VS25153	VS25200				
MVS220CF	2" FULL PORT MANIFOLD VALVE FLANGE X FLANGE W/FKM SEALS	150	2"	2"	9	VS25153	VS25200				
MVSMT220FP	2" FULL PORT MANIFOLD VALVE FLANGE X MALE NPT W/FKM SEALS	225	2"	2"	9	VS25153	VS25200				

Note: N/A repair kits, components available.





#### 2" FULL PORT STUBBY STAINLESS STEEL VALVE

PART NO	DESCRIPTION	MAX PSI	PIPE Size	OPENING THRU BALL		REPLACEMENT HANDLE	REPAIR KIT
VSFMT220SS	2" FULL PORT STUBBY SS VALVE MALE THREAD X MALE ADAPTER	225	2"	2"	1	VSS20153	VSS25200

#### 2" FP STUBBY STAINLESS STEEL VALVE

- PTFE seals, no elastomers
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle
- PTFE self-lubricating stem bushings and seats cannot stick or bind



### **3" STUBBY VALVES**

# **FEATURES**

- FKM seals.
- Precision molded polypropylene is reinforced with fiberglass for additional strength.
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle.
- Ball is diamond turned, after molding, to make it spherically perfect, which provides precise contact between ball and seats. 0
- PTFE self-lubricating stem bushings and seats cannot stick or bind.
- Stainless steel bolts.



	3" MANIFOLD STUBBY VALVES											
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	LOT QTY	REPLACEMENT HANDLE	REPAIR KIT					
MVSF300	3" STANDARD PORT MANIFOLD VALVE FLANGE X MALE ADAPTER	100	3"	2 <sup>1</sup> ⁄2"	6/BOX	V25153	N/A					
MVSF300FP	3" FULL PORT MANIFOLD VALVE FLANGE X MALE ADAPTER	100	3"	3"	6/BOX	V25153	VS35200					
MVSMT300	3" STANDARD PORT MANIFOLD VALVE FLANGE X MALE NPT	225	3"	2 <sup>1</sup> ⁄2"	4	V25153	N/A					
MVS300CF	3" STANDARD PORT MANIFOLD VALVE FLANGE X FLANGE	200	3"	2 <sup>1</sup> ⁄2"	6/BOX	V25153	N/A					
MVS300CFFP	3" FULL PORT MANIFOLD VALVE FLANGE X FLANGE	150	3"	3"	6/BOX	V25153	VS35200					

Note: N/A repair kits, components available.







MVSMT300HSFP

	<b>3" FULL PORT MANIFOLD STUBBY VALVES WITH SS</b>										
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY	REPLACEMENT HANDLE					
MVS300HSFP	3" FULL PORT MANIFOLD STUBBY VALVE FLANGE X FLANGE WITH SS BALL, STEM & HANDLE	100	3"	3"	1	VS30153SS					
MVSMT300HSFP	3" FULL PORT MANIFOLD STUBBY VALVE MALE NPT X FLANGE WITH SS BALL, STEM & HANDLE	200	3"	3"	1	VS30153SS					

### 3" FP STUBBY VALVES WITH STAINLESS STEEL

- Precision molded polypropylene is reinforced with fiberglass for additional strength.
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle.
- Ball is diamond turned, after molding, to make it spherically perfect, which provides precise contact between ball and seats.
- Stainless steel bolts
- Compact design
- FKM seals



### 3 WAY BOTTOM LOAD BALL VALVES

#### **FEATURES**

- Stainless steel bolts
- Precision molded in fiberglass reinforced polypropylene for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation
- Ball is diamond turned after molding to make it spherically perfect, which provides precise contact between ball and seats
- PTFE self-lubricating stem bushings and seats
- FKM body seals
- Directional flow, right or left. Valve can be turned off to stop flow

#### **REPAIR KIT INCLUDES:**

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem o-ring

# 3 WAY SIDE LOAD BALL VALVES

### FEATURES

- Stainless steel bolts
- Precision molded in fiberglass reinforced polypropylene for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation
- Ball is diamond turned after molding to make it spherically perfect, which provides precise contact between ball and seats
- PTFE self-lubricating stem bushings and seats
- FKM body seals
- Directional flow, right or left. Valve cannot be turned off to stop flow



MV300BL

3 WAY BOTTOM LOAD MANIFOLD VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	LOT QTY	HANDLE TYPE	REPLACEMENT HANDLE	REPAIR KIT
MV100BL	1" FP 3-WAY BOTTOM LOAD MANIFOLD VALVE	300	1"	1"	6	Т	N/A	N/A
MV200BL	2" SP 3-WAY BOTTOM LOAD MANIFOLD VALVE	225	2"	11⁄2"	6	Т	V20353TB	V15300SL
MV220BL	2" FP 3-WAY BOTTOM LOAD MANIFOLD VALVE	150	2"	2"	8/BOX	STRAIGHT	V25353B	N/A
MV300BL	3" FP 3-WAY BOTTOM LOAD MANIFOLD VALVE	150	3"	3"	4/BOX	STRAIGHT	V25353B	V35200BL



	3 WAY SIDE LOAD MANIFOLD VALVES							
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	LOT QTY	HANDLE TYPE	REPLACEMENT HANDLE	REPAIR KIT
MV100SL	1" FP 3-WAY SIDE LOAD MANIFOLD VALVE	300	1"	1"	6	Т	N/A	N/A
MV200SL	2" SP 3-WAY SIDE LOAD MANIFOLD VALVE	225	2"	11⁄2"	5	STRAIGHT	V20153SH	V15300SL
MV220SL	2" FP 3-WAY SIDE LOAD FULL PORT MANIFOLD VALVE	100	2"	2"	8/BOX	STRAIGHT	V25153SH	V25200BL





MANIFOLD PRESSURE SPIKE VALVES					
PART NO	DESCRIPTION	CRACKING PRESSURE	MAX PSI	QTY	
MPRV100-050	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	50	300	1	
MPRV100-075	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	75	300	1	
MPRV100-100	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	100	300	1	
MPRV100-125	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	125	300	1	



	MANIFOLD DRY DISCONNECTS							
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY	REPLACEMENT HANDLE	REPAIR KIT	
DM200ACF	2" MALE MANIFOLD DRY-MATE WITH FKM SEALS	100	2"	11⁄2"	1	DM20153M	DM20200A	
DM200DCF	2" FEMALE MANIFOLD DRY-MATE WITH FKM SEALS	100	2"	11⁄2"	1	DM20153F	DM20200D	
DM300ACF	3" MALE MANIFOLD DRY-MATE WITH FKM SEALS	150	3"	3"	1	DM35153M	DM35200	
DM300DCF	3" FEMALE MANIFOLD DRY-MATE WITH FKM SEALS	150	3"	3"	1	DM35153F	DM35200	

Note: Male and female sold separately

#### PRESSURE SPIKE VALVES

#### FEATURES

- FKM seals.
- Precision molded polypropylene is reinforced with fiberglass for additional strength.
- 360° orientation
- Preset pressure spring

#### DRY-MATE™ DRY-DISCONNECTS

#### FEATURES

- · Easy to use
- Minimal fluid spillage
- Reduces risk of exposure
- Wide range of chemical resistance
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps.
- Spillage data:2"=4ml, 3"=15ml

#### **REPAIR KIT INCLUDES:**

- Face seal
- Ball
- Seats
- Body gasket
- Thrust bearings
- Stem bushings



# BOOM NOZZLE PIPE ADAPTER

# FEATURES

- Eliminates having to thread pipe
- Quick and easy assembly
- No welding necessary
- 360° orientation



M100PA



M100PAC



M100PAT

BOOM NOZZLE PIPE ADAPTER				
DESCRIPTION	MAX PSI	LOT QTY		
1" FLANGED PIPE ADAPTER	300	10		
1" FLANGED PIPE ADAPTER CAP	300	1		
1" FLANGED PIPE ADAPTER TEE	300	1		
	DESCRIPTION 1" FLANGED PIPE ADAPTER 1" FLANGED PIPE ADAPTER CAP	DESCRIPTION MAX PSI   1" FLANGED PIPE ADAPTER 300   1" FLANGED PIPE ADAPTER CAP 300		

### INDUCTORS

# FEATURES


- Threaded or manifold ends
- Glass reinforced polypropylene
- Designed for use with a volume pump. Typical volumes (80-240 US GPM) and pressures (26-52 PSI) should be used to operate the inductor.



MHV220A

	MANIFOLD INDUCTORS						
PART NO	DESCRIPTION	PRESSURE AT PUMP	VOLUME DRAW	OPENING SIZE	LOT QTY		
HV200	2" MPT INDUCTOR	225	49 GPM	7/ <sub>16</sub> "	1		
MHV200	2" MANIFOLD INDUCTOR WITH 11/2" PORT	300	37 GPM	<sup>5</sup> / <sub>16</sub> "	1		
MHV220A	2" FULL PORT MANIFOLD INDUCTOR	225	49 GPM	<sup>9</sup> / <sub>16</sub> "	5		



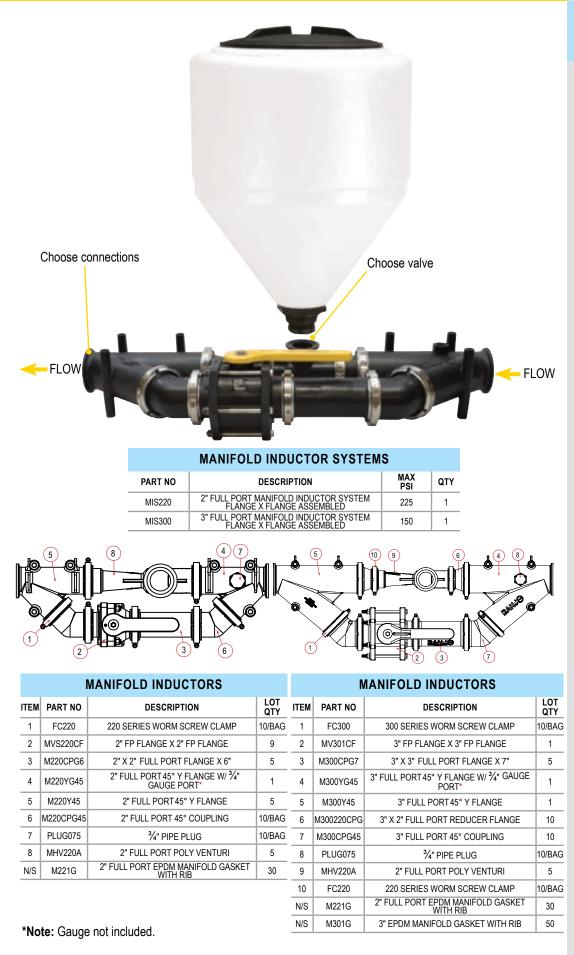

#### **INDUCTOR SYSTEMS**

#### FEATURES

- Installed after pump; suction completely empties inductor tank
- Keeps pump free of chemicals
- Easy assembly/installation with manifold connections found on pages 39-45.
- Choose your connections and valve
- Tank for illustration purposes only, not included



37

#### **FLOW METERS**

#### **FEATURES**

- Displays overall total volume and batch total volume
- Flow rate allows for Gallons or Liters per minute
- The display reads 6 digits for rate, 8 digits for total and 1 decimal place reading in tenths
- Magnetic style meter with 0 stainless steel electrodes
- Self calibrating meter
- Measures water and most 0 conductive liquids
- Easy to change six (6) AA 0 batteries
- No moving parts to fail during 0 use
- Glass-reinforced polypropylene 0
- Temperature range from 0°F to 0 150°F
- ±1% of reading (between 10% and 100% of maximum flow)
- ±3% of reading (between cutoff and 10% of maximum flow)
- There are 3 photoeyes located on the face of the flow meter. These are not push buttons; to activate you must hold your finger over the photoeye for 2-4 seconds
- Flow meters will not read petroleum based liquids
- It is recommended to have at least 10X the diameter of straight pipe before and after the flow meter



**MFM100** 



**MFM220** 

MFM300

FLOW METERS					
PART NO	DESCRIPTION	MAX PSI	GPM	QTY	
MFM100	1" FULL PORT MANIFOLD FLOW METER	200	110 GPM	1	
MFM220	2" FULL PORT MANIFOLD FLOW METER	200	300 GPM	1	
MFM300	3" FULL PORT FLOW METER	200	670 GPM	1	







# FITTINGS

- Quick and easy assembly
- Positive seals
- Easy on/off hose connections
- 360° orientation
- Where noted, parts must be ordered in bag quantities.















SWIVEL				
PART NO	DESCRIPTION	MAX PSI	QTY	
MSW220	2" FULL PORT MANIFOLD FLANGE SWIVEL	200	1	

	CHECK VALVES				
PART NO	DESCRIPTION	OPENING PRESSURE PSI	MAX PSI	LOT QTY	
MCV100	1" FLANGED CHECK VALVE	1	300	10	
MCV200	2" FLANGED CHECK VALVE	0.5	300	10	
MCV221	2" FULL PORT FLANGED CHECK VALVE	>0.5	200	10	
MCV300	3" FLANGED CHECK VALVE W/5 LB SPRING	1.5	200	1	
MCV301	3" FLANGED CHECK VALVE W/1/2 LB SPRING	>0.5	N/A	1	

PVC GLUE SOCKET					
PART NO	DESCRIPTION	MAX PSI	LOT QTY		
M221GSA	2" FULL PORT FLANGE X 2" PVC GLUE SOCKET FITTING	300	10		
M301GSA	3" FULL PORT FLANGE X 3" PVC GLUE SOCKET FITTING	300	1		

316 SS SOCKET WELD					
PART NO	DESCRIPTION	MAX PSI	LOT QTY		
M100SWFSS	1" FLANGE X 1" SOCKET WELD FITTING	300	10		
M200SWFSS	2" FLANGE X 2" SOCKET WELD FITTING	300	1		
M220SWFSS	2" FULL PORT FLANGE X 2" SOCKET WELD FITTING	300	10		
M220375SWFSS	2" FULL PORT FLANGE X 2" SOCKET WELD FITTING X 3¾"	300	1		
M300SWFSS	3" FLANGE X 3" SOCKET WELD FITTING	300	10		
M300375SWFSS	3" FLANGE X 3" SOCKET WELD FITTING X 3¾"	300	1		

COUPLINGS				
PART NO	DESCRIPTION	MAX PSI	LOT QTY	
M100CPG	1" X 1" FLANGE X 21/4" LONG	300	10/BAG	
M200CPG	2" X 2" FLANGE X 41/2" LONG	300	10/BAG	
M220CPG	2" X 2" FULL PORT FLANGE X 2 <sup>31</sup> / <sub>32</sub> " LONG	300	10/BAG	
M220CPG3G	2" X 2" FULL PORT FLANGE X 3" LONG WITH ½" GAUGE PORT	225	1	
M220CPG6	2" X 2" FULL PORT FLANGE X 6" LONG	300	5	
M300CPG	3" X 3" FULL PORT FLANGE X 4" LONG	200	10	
M300CPG7	3" X 3" FULL PORT FLANGE X 7" LONG	225	5	
M300CPG12	3" X 3" FULL PORT FLANGE X 12" LONG	150	1	

	45° COUPLINGS		
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100CPG45	1" X 1" 45° FLANGE	300	10/BAG
M200CPG45	2" X 2" 45° FLANGE	300	10/BAG
M220CPG45	2" X 2" FULL PORT 45° FLANGE	225	10/BAG
M300CPG45	3" X 3" FULL PORT 45° FLANGE	225	10













 $\bigcap$ 

90° COUPLINGS			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100CPG90	1" X 1" 90° FLANGE	300	10/BAG
M200CPG90	2" X 2" 90° FLANGE	300	10/BAG
M200CPG90SH	2" X 2" 90° SHORT FLANGE	300	10/BAG
M220CPG90	2" X 2" 90° FULL PORT FLANGE	200	10/BAG
M300CPG90	3" X 3" 90° FULL PORT FLANGE	200	5

#### 45° Y FLANGED COUPLINGS

PART NO	DESCRIPTION	MAX PSI	LOT QTY
M220Y45	2" FULL PORT 45° Y FLANGE	300	5
M220YG45	2" FULL PORT 45° Y FLANGE W/ 3/4" GAUGE PORT	225	1
M300Y45	3" FULL PORT 45° Y FLANGE	200	1
M300YG45	3" FULL PORT 45° Y FLANGE W/ 3/4" GAUGE PORT	200	1

3" MANIFOLD WYE			
PART NO	DESCRIPTION	MAX PSI	QTY
M300220WYCG	M300 X M220 X M220 X M220 FULL PORT FLANGE WYE W/ 1/4" GAUGE PORT	300	1

REDUCER COUPLINGS			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M200100CPG	2" X 1" REDUCER FLANGE	300	10/BAG
M220100CPG	2" FULL PORT X 1" REDUCER FLANGE	225	10/BAG
M220200CPG	2" FULL PORT X 2" REDUCER FLANGE	225	10/BAG
M300200CPG	3" X 2" REDUCER FLANGE	225	10/BAG
M300220CPG	3" X 2" FULL PORT REDUCER FLANGE	225	10

TEES			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100TEE	1" FLANGED TEE	300	10/BAG
M101TEE	1" FLANGED TEE LONG	300	10
M200100TEE	2" X 1" FLANGED TEE	300	10
M200TEE	2" FLANGED TEE	200	10/BAG
M220100TEE	2" FULL PORT FLANGED TEE X 1" FLANGED TEE	225	10
M220200TEE	2" FULL PORT FLANGED TEE X 2" FLANGED TEE	300	10
M220TEE	2" FULL PORT FLANGED TEE	225	10
M300TEE	3" FLANGED TEE	225	10

	U BOLTS		
PART NO	DESCRIPTION	MAX PSI	LOT QTY
UB100	100 SERIES MOUNTING U BOLT	N/A	1
UB202	2 SERIES MOUNTING U BOLT	N/A	10
UB220	220 SERIES MOUNTING U BOLT	N/A	10

# FITTINGS

- Quick and easy assembly
- Positive seals
- Easy on/off hose connections
- 360° orientation
- Where noted, parts must be ordered in bag quantities



### FITTINGS

- Quick and easy assembly
- Positive seals
- Easy on/off hose connections
- 360° orientation
- Where noted, parts must be ordered in bag quantities.





SS BUTT WELD ADAPTER			
PART NO	DESCRIPTION	MAX PSI	QTY
M220BWASS	2" FULL PORT STAINLESS STEEL BUTT WELD ADAPTER	300	1

FEMALE NPT THREAD			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100050FPT	1" FLANGE X <sup>1</sup> / <sub>2</sub> " FEMALE THREAD	300	10/BAG
M100075FPT	1" FLANGE X <sup>3</sup> / <sub>4</sub> " FEMALE THREAD	300	10/BAG
M100FPT	1" FLANGE X 1" FEMALE THREAD	300	10/BAG
M200FPT	2" FLANGE X 2" FEMALE THREAD	300	10/BAG
M200150FPT	2" FLANGE X 1 <sup>1</sup> ⁄ <sub>2</sub> " FEMALE THREAD	300	10/BAG
M220FPT	2" FULL PORT FLANGE X 2" FEMALE THREAD	300	10/BAG
M300FPT	3" FLANGE X 3" FEMALE THREAD	200	10/BAG

	MALE THREAD		
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100075MPT	1" FLANGE X ¾" MALE THREAD	300	10/BAG
M100MPT	1" FLANGE X 1" MALE THREAD	300	10/BAG
M100125MPT	1" FLANGE X 1¼" MALE THREAD	300	10/BAG
M200125MPT	2" FLANGE X 11/4" MALE THREAD	300	10/BAG
M200150MPT	2" FLANGE X 11/2" MALE THREAD	300	10/BAG
M200MPT	2" FLANGE X 2" MALE THREAD	300	10/BAG
M220MPT	2" FULL PORT FLANGE X 2" MALE THREAD	300	10/BAG
M300MPT	3" FLANGE X 3" MALE THREAD	300	10

316 SS MALE THREAD			
PART NO	DESCRIPTION	MAX PSI	QTY
M100MPTSS	1" FLANGE X 1" MALE THREAD	300	1
M200125MPTSS	2" FLANGE X 11/4" MALE THREAD	300	1
M200150MPTSS	2" FLANGE X 11/2" MALE THREAD	300	1
M200MPTSS	2" FLANGE X 2" MALE THREAD	300	1
M220150MPTSS	2" FULL PORT FLANGE X 11/2" MALE THREAD	300	1
M220MPTSS	2" FULL PORT FLANGE X 2" MALE THREAD	300	1
M300220MPTSS	3" FLANGE X 2" FULL PORT MALE THREAD	300	1
M300MPTSS	3" FLANGE X 3" MALE THREAD	300	1











PLUGS			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100PLG	1" FLANGE PLUG	300	10/BAG
M200PLG	2" FLANGE PLUG	300	10/BAG
M220PLG	2" FULL PORT FLANGE PLUG	300	10/BAG
M300PLG	3" FULL PORT FLANGE PLUG	225	10/BAG
M100PLG025	1" FLANGE PLUG WITH 1/4" FPT	300	10/BAG
M100PLG050	1" FLANGE PLUG WITH 1/2" FPT	300	10/BAG
M200PLG025	2" FLANGE PLUG WITH 1/4" FPT	225	10/BAG
M200PLG038	2" FLANGE PLUG WITH %" FPT	300	10/BAG
M200PLG050	2" FLANGE PLUG WITH 1/2" FPT	225	10/BAG
M200PLG075	2" FLANGE PLUG WITH 3/4" FPT	225	10/BAG
M200PLG100	2" FLANGE PLUG WITH 1" FPT	225	10/BAG
M220PLG038	2" FULL PORT FLANGE PLUG WITH %" FPT	150	10/BAG
M220PLG075	2" FULL PORT FLANGE PLUG WITH 3/4" FPT	225	10/BAG
M300PLG075	3" FLANGE PLUG WITH 3/4" FPT	200	10/BAG
M300PLG100	3" FLANGE PLUG WITH 1" FPT	200	1

# FITTINGS

- Quick and easy assembly
- Positive seals
- Easy on/off hose connections
- 360° orientation
- Where noted, parts must be ordered in bag quantities



FEMALE COUPLER			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M220D	2" FULL PORT FLANGE X 2" FEMALE COUPLER	225	20
M303D	3" FULL PORT FLANGE X 3" FEMALE COUPLER WITH 3 ARMS	225	10



MALE ADAPTER			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100A	1" FLANGE X 1" MALE ADAPTER	300	10/BAG
M200A	2" FLANGE X 2" MALE ADAPTER	300	10/BAG
M220A	2" FULL PORT FLANGE X 2" MALE ADAPTER	225	10/BAG
M300A	3" FULL PORT FLANGE X 3" MALE ADAPTER	100	10



	CROSS		
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100CR	1" FLANGED CROSS	300	10/BAG
M200CR	2" FLANGED CROSS	300	10
M220CR	2" FULL PORT FLANGED CROSS	200	10
M300CR	3" FLANGED CROSS	125	5



# FITTINGS

### **FEATURES**

- Quick and easy assembly
- Positive seals
- Easy on/off hose connections
- 360° orientation
- Where noted, parts must be ordered in bag quantities.



	HOSE BARB		
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100075BRB	1" FLANGE X ¾" HOSE BARB	300	10/BAG
M100BRB	1" FLANGE X 1" HOSE BARB	300	10/BAG
M100125BRB	1" FLANGE X 11/4" HOSE BARB	300	10/BAG
M200100BRB	2" FLANGE X 1" HOSE BARB	300	10/BAG
M200125BRB	2" FLANGE X 11/4" HOSE BARB	300	10/BAG
M200150BRB	2" FLANGE X 1 <sup>1</sup> ⁄ <sub>2</sub> " HOSE BARB	300	10/BAG
M200BRB	2" FLANGE X 2" HOSE BARB	300	10/BAG
M220100BRB	2" FULL PORT FLANGE X 1" HOSE BARB	300	10/BAG
M220125BRB	2" FULL PORT FLANGE X 11/4" HOSE BARB	300	10/BAG
M220150BRB	2" FULL PORT FLANGE X 11/2" HOSE BARB	300	10/BAG
M220BRB	2" FULL PORT FLANGE X 2" HOSE BARB	300	10/BAG
M300220BRB	3" FLANGE X 2" FULL PORT HOSE BARB	125	10
M300BRB	3" FLANGE X 3" HOSE BARB	200	10

# 90° HOSE BARB ELBOW

PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100075BRB90	1" FLANGE X ¾" 90° HOSE BARB	300	10/BAG
M100BRB90	1" FLANGE X 1" 90° HOSE BARB	300	10/BAG
M100125BRB90	1" FLANGE X 1¼" 90° HOSE BARB	300	10/BAG
M100150BRB90	1" FLANGE X 1 <sup>1</sup> / <sub>2</sub> " 90° HOSE BARB	300	10/BAG
M200100BRB90	2" FLANGE X 1" 90° HOSE BARB	300	10/BAG
M200125BRB90	2" FLANGE X 1¼" 90° HOSE BARB	300	10/BAG
M200150BRB90	2" FLANGE X 11/2" 90° HOSE BARB	300	10/BAG
M200BRB90	2" FLANGE X 2" 90° HOSE BARB	300	10/BAG
M220150BRB90	2" FULL PORT FLANGE X 11/2" 90° HOSE BARB	300	10/BAG
M220BRB90	2" FULL PORT FLANGE X 2" 90° HOSE BARB	300	10/BAG
M300220BRB90	3" FLANGE X 2" 90° FULL PORT HOSE BARB	300	1
M300BRB90	3" FLANGE X 3" 90° HOSE BARB	150	10

	45° HOSE BARB ELBOW		
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100BRB45	1" FLANGE X 1" 45° HOSE BARB ELBOW	300	10/BAG
M200BRB45	2" FLANGE X 2" 45° HOSE BARB ELBOW	300	10/BAG
M200125BRB45	2" FLANGE X 11/4" 45° HOSE BARB ELBOW	300	10/BAG
M200150BRB45	2" FLANGE X 11/2" 45° HOSE BARB ELBOW	300	10/BAG
M220BRB45	2" FULL PORT FLANGE X 2" 45° HOSE BARB ELBOW	300	10/BAG
M300BRB45	3" FLANGE X 3" 45° HOSE BARB ELBOW	150	10

HOSE BARB TEE			
PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100050HBT	1" FLANGE X 1/2" HOSE BARB TEE	N/A	10/BAG
M100075HBT	1" FLANGE X ¾" HOSE BARB TEE	N/A	10/BAG
M100100HBT	1" FLANGE X 1" HOSE BARB TEE	300	10/BAG
M220200HBT	2" FULL PORT FLANGE X 2" HOSE BARB TEE	300	10/BAG
M300300HBT	3" FLANGE X 3" HOSE BARB TEE	150	10/BAG









QTY

1

1







	BOLTED FLANGE CLAMPS	
PART NO	DESCRIPTION	TORQUE
FC220B	2" FULL PORT BOLTED FLANGE CLAMP	150 IN/LBS
FC300B	3" BOLTED FLANGE CLAMP	150 IN/LBS

T-BOLT FLANGE CLAMPS			
PART NO DESCRIPTION TORQUE			
FC220TB	2" FULL PORT HI-TORQUE T-BOLT FLANGE CLAMP	100 IN/LBS	10/BAG
FC300TB	3" FULL PORT HI-TORQUE T-BOLT FLANGE CLAMP	100 IN/LBS	10/BAG

	FLANGE CLAMPS		
PART NO	DESCRIPTION	TORQUE	QTY
FC100	100 SERIES WORM SCREW CLAMP	50-60 IN/LBS	10/BAG
FC200	200 SERIES WORM SCREW CLAMP	90-100 IN/LBS	10/BAG
FC220	220 SERIES WORM SCREW CLAMP	90-100 IN/LBS	10/BAG
FC300	300 SERIES WORM SCREW CLAMP	90-100 IN/LBS	10/BAG

	GASKETS		
PART NO	DESCRIPTION	GASKET MATERIAL	LOT QTY
M100G	100 SERIES MANIFOLD GASKET	EPDM	25
M101G	100 SERIES MANIFOLD GASKET WITH RIB	EPDM	35
M102G	1" & 11/4" SKIRTED FLANGE GASKET	EPDM	1
M100GV	100 SERIES GASKET	FKM	25
150G	200 SERIES GASKET	EPDM	25
150GV	200 SERIES GASKET	FKM	25
200G	220 SERIES FULL PORT GASKET	EPDM	25
200GV	220 SERIES FULL PORT GASKET	FKM	25
M201G	200 SERIES MANIFOLD GASKET WITH RIB	EPDM	30
M202G	11/2" SKIRTED FLANGE GASKET	EPDM	1
M221G	220 SERIES FULL PORT MANIFOLD GASKET WITH RIB	EPDM	30
M222G	2" SKIRTED FLANGE GASKET	EPDM	1
300G	300 SERIES GASKET	EPDM	25
300GV	300 SERIES GASKET	FKM	25
M301G	300 SERIES MANIFOLD GASKET WITH RIB	EPDM	50
M302G	3" SKIRTED FLANGE GASKET	EPDM	1



Rib keeps gasket in place during assembly.



# FEATURES

- Quick and easy assembly
- Positive seals
- Easy on/off hose connections
- 360° orientation
- Where noted, parts must be ordered in bag quantities



M302G



200GV



# **1"-2" T LINE STRAINERS**

# FEATURES

- EPDM gaskets
- Poly ribbed 316 stainless steel screens



1" FULL PORT MANIFOLD T LINE STRAINERS			
PART NO	DESCRIPTION	MAX PSI	QTY
MLST100-30	1" MANIFOLD T STRAINER W/30 MESH SCREEN	300	1
MLST100-50	1" MANIFOLD T STRAINER W/50 MESH SCREEN	300	1
MLST100-80	1" MANIFOLD T STRAINER W/80 MESH SCREEN	300	1
MLST100-100	1" MANIFOLD T STRAINER W/100 MESH SCREEN	300	1

2" STANDARD PORT MANIFOLD T LINE STRAINERS			
PART NO	DESCRIPTION	MAX PSI	QTY
MLST150-30	2" MANIFOLD T STRAINER W/30 MESH SCREEN	225	1
MLST150-50	2" MANIFOLD T STRAINER W/50 MESH SCREEN	225	1
MLST150-80	2" MANIFOLD T STRAINER W/80 MESH SCREEN	225	1
MLST150-80V	2" MANIFOLD T STRAINER W/80 MESH SCREEN WITH FKM GASKETS	225	1
MLST150-100	2" MANIFOLD T STRAINER W/100 MESH SCREEN	225	1

# **1"-2" Y LINE STRAINERS**

# FEATURES


- EPDM gaskets
- Poly ribbed 316 stainless steel screens



1" FULL PORT MANIFULD Y LINE STRAINERS				
PART NO	MAX PSI	QTY		
MLS100-80	1" MANIFOLD Y STRAINER W/80 MESH SCREEN	225	1	

2" STANDARD PORT MANIFOLD Y LINE STRAINERS					
PART NO	DESCRIPTION	MAX PSI	QTY		
MLS200-06	2" MANIFOLD Y STRAINER W/6 MESH SCREEN	225	1		
MLS200-12	2" MANIFOLD Y STRAINER W/12 MESH SCREEN	225	1		
MLS200-20	2" MANIFOLD Y STRAINER W/20 MESH SCREEN	225	1		
MLS200-30	2" MANIFOLD Y STRAINER W/30 MESH SCREEN	225	1		
MLS200-50	2" MANIFOLD Y STRAINER W/50 MESH SCREEN	225	1		
MLS200-80	2" MANIFOLD Y STRAINER W/80 MESH SCREEN	225	1		





(1)

REPLACEMENT

PART NO

MLS100B

LS100-C1

12777

UV15163

LS100-G

LS120

LS140

LS180

MLS100BC

ITEM

1 2

3

4

5

6

6

6

KIT

6

-(5) (2)

<b>REPLACEMENT PARTS 1</b> "			
ITEM	PART NO	DESCRIPTION	QTY
1	MLST100-H	1" T BODY	1
2	LST100-B	1" T BOWL, DRAIN PLUG, O-RING	1
3	12777	½" PLUG	1
4	UV15163	O-RING	1
5	LST100-G	1" EPDM GASKET	1
5	LST100-GV	1" FKM GASKET	1
6	LST116	16 MESH SCREEN	1
6	LST130	30 MESH SCREEN	1
6	LST150	50 MESH SCREEN	1
6	LST180	80 MESH SCREEN	1
6	LST1100	100 MESH SCREEN	1
KIT	MLST100-HB	KIT INCLUDES ITEMS 1-5	1

#### **REPLACEMENT PARTS 2**

ITEM	PART NO	DESCRIPTION	QTY
1	MLST150-H	11⁄2" T BODY	1
2	LST150-B	1 <sup>1</sup> / <sub>2</sub> " T BOWL, DRAIN PLUG, O-RING	1
3	LSQ200-PL	1½" PLUG	1
4	LSQ200-R	O-RING	1
5	LST150-G	1 <sup>1</sup> ⁄ <sub>2</sub> " EPDM GASKET	1
5	LST150-GV	1 <sup>1</sup> ⁄ <sub>2</sub> " FKM GASKET	1
6	LST1516	16 MESH SCREEN	1
6	LST1530	30 MESH SCREEN	1
6	LST1550	50 MESH SCREEN	1
6	LST1580	80 MESH SCREEN	1
6	LST15100	100 MESH SCREEN	1
KIT	MLST150-HB	KIT INCLUDES ITEMS 1-5	1

# **T LINE STRAINERS**

SCREENS			
MESH SIZE	<b>RIB COLOR</b>		
16 MESH	BROWN RED		
30 MESH	FLAME RED		
50 MESH	GENTIAN BLUE		
80 MESH	ZINC YELLOW		
100 MESH	TRAFFIC GREEN		

# **Y LINE STRAINERS**

SCREENS			
MESH SIZE	<b>RIB COLOR</b>		
6 MESH	WHITE		
12 MESH	BLACK		
20 MESH	BEIGE		
30 MESH	FLAME RED		
40 MESH	BROWN		
50 MESH	GENTIAN BLUE		
80 MESH	ZINC YELLOW		
100 MESH	TRAFFIC GREEN		
120 MESH	BLACK		

# **REPLACEMENT PARTS 2"**

I A A A A A A A A A A A A A A A A A A A		ITEM	PART NO	DESCRIPTION	QTY			
	3	1	MLS200B	2" Y BODY	1			
Č 🗶	-0	2	LS150-C	2" Y BOWL, DRAIN PLUG, O-RING	1			
- 0		3	LSQ200-PL	2" PLUG	1			
ACEMENT PARTS 1"			LSQ200-R	O-RING	1			
DESCRIPTION	QTY	5	LS150-G	2" EPDM GASKET	1			
1" Y BODY	1	5	LS150-GV	2" FKM GASKET	1			
1" Y BOWL, DRAIN PLUG, O-RING	1	6	LS206	6 MESH SCREEN	1			
1⁄2" PLUG	1	6	LS212	12 MESH SCREEN	1			
O-RING	1	6	LS220	20 MESH SCREEN	1			
1" EPDM GASKET	1	6	LS230	30 MESH SCREEN	1			
20 MESH SCREEN	1	6	LS250	50 MESH SCREEN	1			
40 MESH SCREEN	1	6	LS280	80 MESH SCREEN	1			
80 MESH SCREEN	1	6	LS2120	120 MESH SCREEN	1			
KIT INCLUDES ITEMS 1-5	1	KIT	MLS200BC	KIT INCLUDES ITEMS 1-5	1			



47

# 2" FULL PORT Y LINE STRAINERS

# FEATURES

- EPDM gaskets
- 316 stainless steel screens



### **2" FULL PORT MANIFOLD Y LINE STRAINERS**

PART NO	DESCRIPTION	MAX PSI	QTY
MLS222-04	2" FULL PORT MANIFOLD Y STRAINER W/4 MESH SCREEN	225	1
MLS222-10	2" FULL PORT MANIFOLD Y STRAINER W/12 MESH SCREEN	225	1
MLS222-16	2" FULL PORT MANIFOLD Y STRAINER W/16 MESH SCREEN	225	1
MLS222-30	2" FULL PORT MANIFOLD Y STRAINER W/30 MESH SCREEN	225	1
MLS222-50	2" FULL PORT MANIFOLD Y STRAINER W/50 MESH SCREEN	225	1
MLS222-80	2" FULL PORT MANIFOLD Y STRAINER W/80 MESH SCREEN	225	1

### **3" Y LINE STRAINERS**

### FEATURES


- EPDM gaskets
- 304 stainless steel screens
- Must use on suction side or non-pressure side in all applications



#### **3" FULL PORT MANIFOLD Y LINE STRAINERS**

PART NO	DESCRIPTION	MAX PSI	LOT QTY
MLS300-12	3" MANIFOLD Y STRAINER W/12 MESH SCREEN	100	1
MLS300-20	3" MANIFOLD Y STRAINER W/20 MESH SCREEN	100	2
MLS300-50	3" MANIFOLD Y STRAINER W/50 MESH SCREEN	100	2



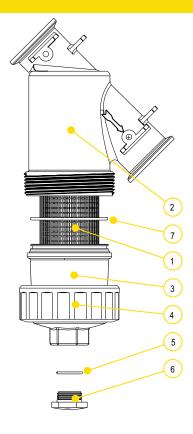

	REPI	ACEMENT PARTS 2"	
ITEM	PART NO	DESCRIPTION	QTY
1	LST204SS	4 SS MESH SCREEN	1
1	LST206SS	6 SS MESH SCREEN	1
1	LST208SS	8 SS MESH SCREEN	1
1	LST210SS	10 SS MESH SCREEN	1
1	LST216SS	16 SS MESH SCREEN	1
1	LST230SS	30 SS MESH SCREEN	1
1	LST250SS	50 SS MESH SCREEN	1
1	MLS250SS	50 SS MESH PERFORATED SCREEN	1
1	LST280SS	80 SS MESH SCREEN	1
1	MLS280SS	80 SS MESH PERFORATED SCREEN	1
1	LST2100SS	100 SS MESH SCREEN	1
1	MLS2100SS	100 SS MESH PERFORATED SCREEN	1
2	MLS222B	2" FLANGED Y STRAINER BODY	1
3	MLS220C1	2" FLANGED Y STRAINER CAP	1
4	MLS220R1	2" FLANGED Y STRAINER RING	1
5	LSQ200-R	2" PLUG GASKET	1
6	LSQ200-PL	2" PLUG	1
7	MLS220G1	2" BODY GASKET	1
2-7	MLS222BC	STRAINER WITHOUT SCREEN	1


# 2" FULL PORT Y LINE STRAINERS

# FEATURES

- EPDM gaskets
- 316 stainless steel screens

# **3" Y LINE STRAINERS**

- EPDM gaskets
- 304 stainless steel screens
- Must use on suction side or non-pressure side in all applications

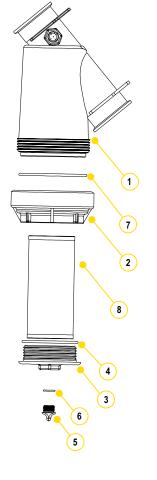

	<b>REPLACEMENT PARTS 3</b> "				
ITEM	PART NO	DESCRIPTION	QTY		
1	MLS300B	3" FLANGED Y STRAINER BODY	1		
2	MLS300CAP	3" FLANGED Y STRAINER CAP	1		
3	LS300EC	3" END CAP	1		
4	MLS300ECG	3" EPDM END CAP GASKET	1		
4	MLS300ECGV	3" FKMEND CAP GASKET	1		
5	13777	¾" PLUG	1		
6	13778	O-RING	1		
7	MLS300G	3" EPDM CAP GASKET	1		
8	LS304	4 SS MESH SCREEN	1		
8	LS308	8 SS MESH SCREEN	1		
8	LS312	12 SS MESH SCREEN	1		
8	LS320	20 SS MESH SCREEN	1		
8	LS350	50 SS MESH SCREEN	1		
1-7	MLS300BC	STRAINER WITHOUT SCREEN	1		



# **BOTTOM DRAIN BOLTED TANK FITTINGS**

#### **FEATURES**

- Stainless steel bolts
- Bolt head plugs sealed 0 ultrasonically
- Glass reinforced polypropylene
- EDPM gasket standard
- FKM gasket available

# **BOTTOM DRAIN BULKHEAD FITTINGS**

#### **FEATURES**

- Glass reinforced polypropylene
- EDPM standard
- Groove allows more drainage
- · Gasket not included



PART NO	DESCRIPTION	MAX PSI	LOT QTY	
MBF100BD	1" FLANGE X 1" FEMALE THREAD W/EPDM GASKET	150	5	
MBF200BD	2" FLANGE X 2" FEMALE THREAD W/EPDM GASKET	150	5	
MBF220BD	2" FP FLANGE X 2" FEMALE THREAD W/EPDM GASKET	150	5	
MBF300BD	3" FLANGE X 3" FEMALE THREAD W/EPDM GASKET	150	8	

BOTTOM DRAIN BOI TED TANK FITTINGS



BOTTOM DRAIN BULKHEAD FITTINGS					
PART NO	DESCRIPTION	HOLE SIZE	MAX PSI	LOT QTY	
MTF220BD	2" FP FLANGE X 2" FEMALE THREAD W/EPDM GASKET	3 <sup>1</sup> ⁄4"	300	10	
MTF300BD	3" FLANGE X 3" FEMALE THREAD W/EPDM GASKET	4½"	200	1	

# **BOLTED TANK FITTINGS**

- Stainless steel bolts
- Bolt head plugs sealed ultrasonically
- Glass reinforced polypropylene
- EDPM gasket standard
- FKM gasket available



BOLTED TANK FITTINGS					
PART NO	DESCRIPTION	MAX PSI	LOT QTY		
MBF100	1" FLANGE X 1" FEMALE THREAD W/EPDM GASKET	150	5		
MBF200	2" FLANGE X 2" FEMALE THREAD W/EPDM GASKET	150	5		
MBF220	2" FP FLANGE X 2" FEMALE THREAD W/EPDM GASKET	150	5		
MBF300	3" FLANGE X 3" FEMALE THREAD W/EPDM GASKET	150	5		



